

CAVITY

Smooth curve. Pleasant light.

The CAVITY range of luminaires offers an innovative, convincing solution for downlight, in which a specially conceived, curved aluminum body replaces the reflector. The illuminant is recessed deeply in the body, whose shape allows the light to spread freely from a trumpet-shaped exit. The light appears to be sucked outwards, producing a glare-free, bright and powerful light that has a pleasant effect irrespective of where you are in a room.


With its simple, harmonious and sealed-looking die-cast aluminum body, CAVITY has a charming compact shape that deliberately eschews any material mixes. The various versions of CAVITY can be integrated into a wide range of interiors and architectural contexts.

CAVITY can be recessed, surface-mounted, or used as a suspended luminaire, and comes in four finishes and two sizes, S (small) and L (large), for use wherever different lighting tasks can be met uniformly with a single family of luminaires.


The CAVITY suspended luminaires are held aloft by thin, live wires and in size L are also infinitely adjustable.

All models will be available from the third quarter of 2018.


CAVITY



CAVITY Recessed S, L



CAVITY Ceiling S, L

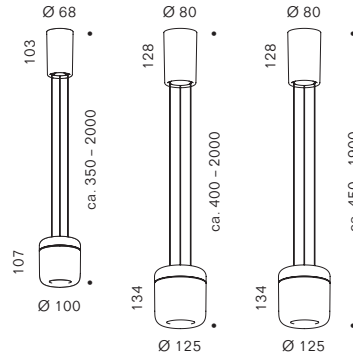

CAVITY Suspension S, L
CAVITY Suspension Adjustable L

material	housing: aluminium with black or white coating, aluminium gloss finish or bronze finish
lamp	Ceiling S, Recessed S, Suspension S: LED CoB 12 W; Ceiling L, Recessed L, Suspension L, Suspension Adjustable L: LED CoB 20 W, LED-Holder: Zhaga compatible, CRI Ra>95, R9>90, EEK A+ (suitable for A++ bis A); other technical versions (CCT/CRI/power) on request; LED unit can be replaced on site
control	Ceiling S, Recessed S, Suspension S: TRIAC dimmable with external trailing edge dimmers; Ceiling L, Recessed L, Suspension L, Suspension Adjustable L: TRIAC dimmable with external trailing edge dimmers, DALI or 1-10 V
light	directed downwards, shielded to the sides
features	housing tool-free mountable; 110 V versions on request; Ceiling L, Recessed L, Suspension L, Suspension Adjustable L: DALI and 1-10 V versions are suitable for the use in emergency lighting systems; Recessed S, Recessed L: suitable for installation in suspended ceilings; Suspension S, Suspension L, Suspension Adjustable L: suitable for ceiling heights up to 3 m, special lengths on request; Suspension Adjustable L: convenient height adjustment
design	Manfred Wolf