


CAVITY

Data Sheet

Suspension



CAVITY Suspension L • white

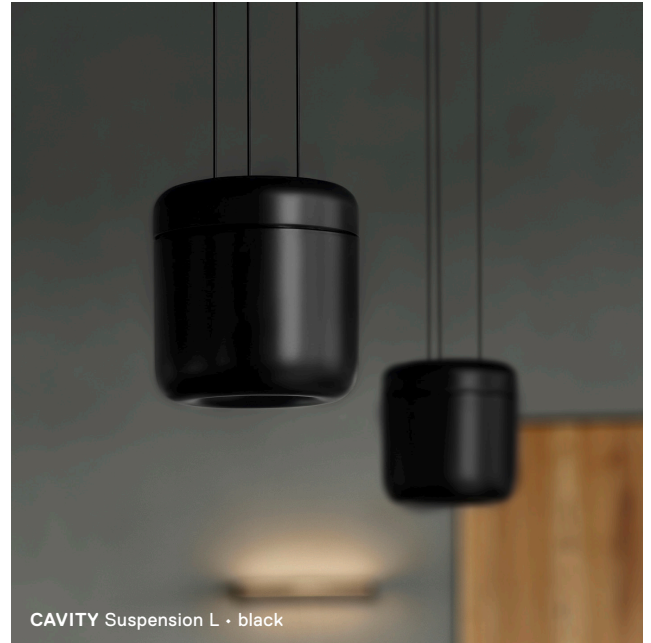

CAVITY Suspension L • black



CAVITY Suspension L • bronze finish

CAVITY

Family

Smooth curve.
Pleasant light.

Instead of a reflector, CAVITY uses a specially designed, curved aluminium body. The illuminant is recessed inside this body, whose shape allows the light to spread freely as it is seemingly sucked outwards. The result is a downlight with a soft, glare-free luminescence that has a pleasant effect from all angles.


CAVITY can be installed in all spaces where pendant luminaires are to ensure a perfect and pleasant lighting effect.

On its own, grouped together or lined up, CAVITY sets accents in rooms as well as above table surfaces and counters.

Different lighting tasks can be met uniformly by combining the suspended with the recessed and surface-mounted varieties of this luminaire family in four finishes and two sizes, S (small) and L (large).

Design da Costa & Wolf

overview

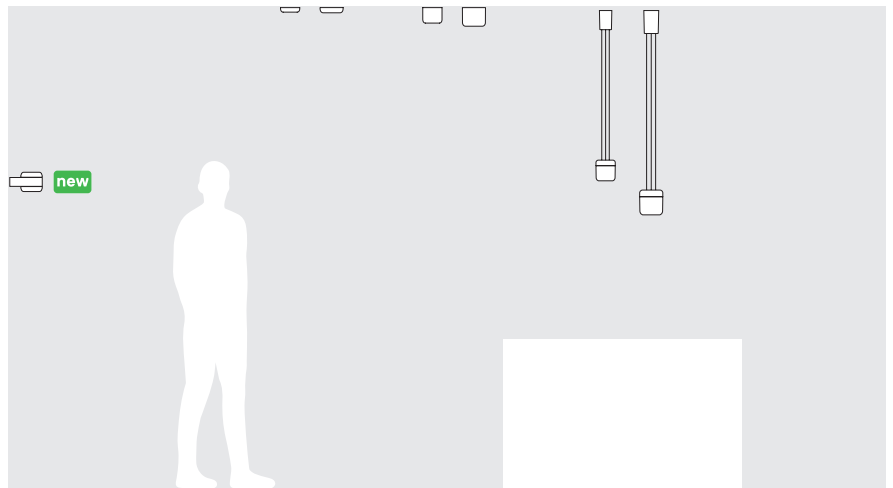

typologies

	S	L
Ceiling	●	●
Recessed	●	●
Suspension	●	●
Wall	● new	

product features



- LED suspension luminaire
- two sizes S and L
- integrated control gear S: 10W and L: 18W
- dimmable via phase dimming (TRIAC) or DALI
- suitable for ceiling heights up to 3,3 m
(the height adjustment is freely selectable by the cable length from 400 to 2000 mm)
- Canopy profile 2 and 3 as accessories
(enables the mounting of 2 or 3 CAVITY Suspension L)

surfaces



black
RAL 9005, powder coating matt



white
RAL 9010, powder coating matt



aluminium gloss finish
PVD coating, high-gloss metal vapour deposition



bronze finish
PVD coating, high-gloss metal vapour deposition

Colour deviations and tolerances due to production technology are possible even if the colour is specified exactly by RAL numbers.

materials

housing

- aluminium housing with excellent thermal properties for optimal heat dissipation of the LED

optic

- glass diffuser lens with satin finished surface on one side for diffused light

rope

- matt black cable with Kevlar core, Ø 2mm

lighting technology



- 2700K
- 3000K

CRI ≥ 97

- excellent colour reproduction quality

2 SDCM


- very high colour consistency - minimal colour temperature differences (MacAdam Step 2)



- CAVITY diffuser pane
- one-sided satin finished glass pane (white glass)
- soft, diffused light

technical data

variants

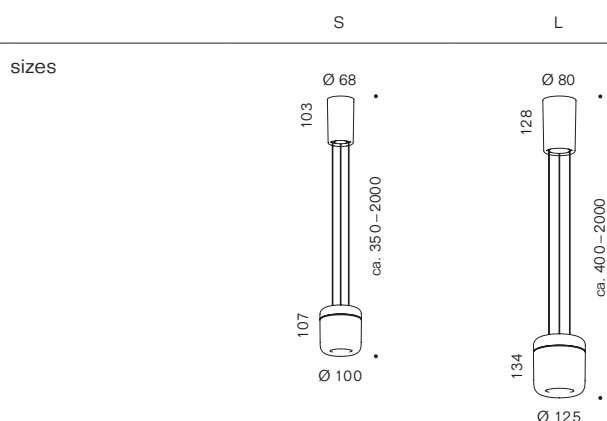

weight	1,2 kg	1,5 kg
--------	--------	--------


light source	size/type	CCT	CRI	MacAdam SDCM	luminous flux (EEK)
S LED		2700 K	Ra > 97	2 Step	110 lm/W (E)
		3000 K	Ra > 97	2 Step	115 lm/W (E)
L LED		2700 K	Ra > 97	2 Step	111 lm/W (E)
		3000 K	Ra > 97	2 Step	116 lm/W (E)

Other versions (CCT/CRI) available on request.

control gear	Suspension S	Suspension L
TRIAC phase dimming	10 W	18 W
DALI	10 W new	18 W PushDim

Please note: In addition to the DALI control gear, a DALI system requires a control gear and the appropriate bus wiring. In addition to the standard wiring L, N and PE, two further DALI control lines DA are required.

note



- one canopy profile allows the mounting of two or three CAVITY Suspension L



- control gear can be replaced by specialists.
- light source can be replaced by specialists.

certificates



lighting data

↓ The photometric data (EULUMDAT) can be downloaded from <http://serien.com/downloads/>.

CAVITY

Suspension S white




	CRI	luminous efficacy	power	luminous flux
3000K	Ra > 97, R9 > 80	43 lm/W	10W	424 lm
distribution			light: directed downwards, laterally shielded	
UGR	≤ 19,9			

CAVITY

Suspension L white

	CRI	luminous efficacy	power	luminous flux
3000K	Ra > 97, R9 > 80	55 lm/W	18W	988 lm
distribution			light: directed downwards, laterally shielded	
UGR	≤ 21,4			

Information

+ C	+C indicates products with pre-programmed CASAMBI module integrated in the luminaire. The CASAMBI functionality is basically applicable to all our products. For the different possibilities of integration (depending on the temperature) – in the luminaire, in the suspended ceiling, in the switch or the distribution box) we will be pleased to inform you. CASAMBI is a lighting control system which is operated via Bluetooth and can be integrated completely into the luminaire or behind the light switch. It is controlled via mobile devices using the free CASAMBI app, making its operation simple and intuitive. CASAMBI expands the possibilities of control with new options such as dimming, the programming of specific scenarios or groups, automations and many more. For further information, please visit www.casambi.com .
CCT	CCT (Correlated Color Temperature) is the colour temperature of an LED and is specified in Kelvin (K). We supply LED lights with a colour temperature of 2700 K at short notice. LED lights with a color temperature of 3000 K and higher usually have longer delivery times.
CRI	Colour Rendering Index
Dim2Warm	Dim2Warm refers to a luminaire functionality that imitates the pleasant dimming behavior of classic incandescent lamps. When dimmed, the light not only becomes darker, but also changes its colour to warm white tone.
DALI	5-core mains cable required for control via DALI
Lumen	The luminous flux (lumen) specifications are nominal values, i.e. pure module luminous flux values. The luminous flux indicates how much light radiates in all directions.
PushDim	The PushDim function enables the use of a commercially available push-button, which can be used to regulate the brightness by pressing it for a longer period of time. A 5-wire mains cable is required.
Tunable White	Luminaires with this characteristic have variable colour temperature control from warm to cool white light.
UGR	Unified Glare Rating
IP	Protection class
LOR	The luminaire operating efficiency is given as a LOR value (Light Output Ratio) in percent.
	The crossed-out wheelee bin indicates that this electrical appliance must not be disposed of via household waste. In order to protect human health and the environment against potentially hazardous substances, at the end of its lifecycle this product can be taken to a collection point close to you and disposed of free of charge there. This separate disposal enables electrical appliances to be reused or recycled.
	At www.serien.com/downloads you will find helpful information and the latest technical data: Data sheets, catalogues, price lists, lighting data (EULUMDAT), 3D CAD data, EU Energy labels, declarations of conformity, returns form, FAQs, assembly instructions, drilling templates and other service instructions.
	This data sheet supersedes all previously published data sheets. The drawings shown in this document are for informational purposes only. Although great care has been taken when creating them, their proportions may not correctly reflect the proportions of the real product.

All values are rated values. Power and luminous flux are subject to an initial tolerance of +/- 10%. Tolerance of color temperature: +/-150 K. When not otherwise indicated the values apply for an ambient temperature of 25 °C. The specified nominal and measured values refer to the illuminants used at the time the data sheet was prepared. Omissions excepted.

Imprint

serien Raumluchten GmbH, HRB 22042 Amtsgericht Offenbach. Managing Directors: Jean-Marc da Costa, Manfred Wolf. All rights reserved. No reproductions without prior written consent. All trademarks are registered. All products are protected by law. Infringements will be prosecuted to the fullest extent. Subject to alteration without notice.